

# MTS LED MODULE TRUNKING




# HARCROFT LIGHTING

Proudly Australian Owned and manufactured




Our MTS (Module Trunking System) LED is a sleek looking aluminium extruded luminaire which incorporates a high transmission Plexiglas slide in diffuser. Available in various lumen packages, kelvin colour temperatures, powder coating colours and dimming options to best suit your requirements. Can be surface mounted or suspended. Ideal for offices, retail facilities and all aisle lighting

Part No	Power consumption (Watts)	CCT	CRI	COB Lumen	Lumen Flux	Mtg. Ctrs.	Lifetime L70b50	Size ( LxWxH ) mm	Weight (Mass)
1MTSML5700Z04AA	41w	4000k	>80	5700lm	4100lm	1800mm (Max)	50,000h	1125 x 85 x 85	3.0kg
2MTSML5700Z04AA	79w	4000k	>80	11400lm	8200lm	1800mm (Max)	50,000h	2245 x 85 x 85	6.0kg
4MTSML5700Z04AA	158w	4000k	>80	22800lm	16400lm	1800mm (Max)	50,000h	4490 x 85 x 85	12.0kg
1MTSML4400Z04AA	31w	4000k	>80	4400lm	3200lm	1800mm (Max)	50,000h	1125 x 85 x 85	3.0kg
2MTSML4400Z04AA	69w	4000k	>80	8800lm	6400lm	1800mm (Max)	50,000h	2245 x 85 x 85	6.0kg
4MTSML4400Z04AA	138w	4000k	>80	17600lm	12800lm	1800mm (Max)	50,000h	4490 x 85 x 85	12.0kg
1MTSML2800Z04AA	20w	4000k	>80	2800lm	2100lm	1800mm (Max)	50,000h	1125 x 85 x 85	3.0kg
2MTSML2800Z04AA	39w	4000k	>80	5600lm	4200lm	1800mm (Max)	50,000h	2245 x 85 x 85	6.0kg
4MTSML2800Z04AA	78w	4000k	>80	11200lm	8400lm	1800mm (Max)	50,000h	4490 x 85 x 85	12.0kg

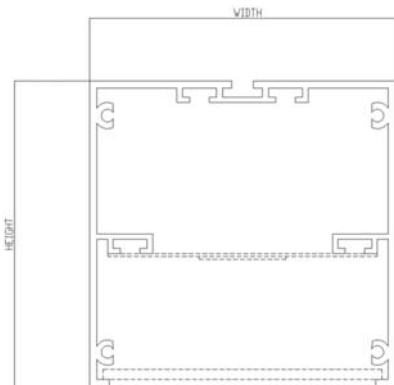

## FEATURES

Available in 1, 2 or 4 Modular Units  
 Aluminium Continuous Interlocking Modular System  
 Powder coated white  
 Efficacy: up to 145 lm/W (module) & 37.3W per Meter  
 Suspension Mounted  
 Interconnecting for fast installation  
 Plexiglass diffuser  
 IP44  
 5 Year warranty  
 (subject to standard terms and conditions )

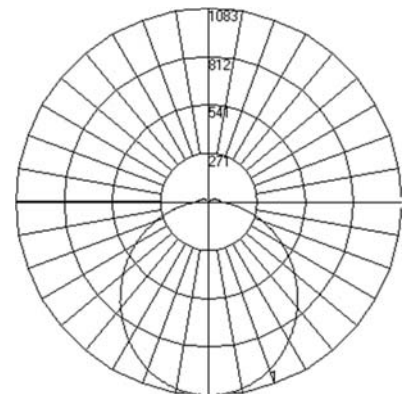

## Options

Colour temperature options (kelvin)  
 Dimming options  
 Emergency module  
 DALI addressable  
 Sensing options  
 Powder coating colour options  
 This fitting can be modified to order please contact our sales department for your requirements

## Compliance / Approvals

Input voltage 220-240 / 50Hz  
 AS60598  
 EMC (CISPR15)  
 C tick  
 SAA

### Disclaimer:

Whilst every care has been taken to ensure its accuracy, Harcroft Lighting will not accept responsibilities for any errors and omissions. Harcroft Lighting reserves the right to make changes from time to time without notice or obligation in specification, design, colour or materials including alterations to or discontinue models.