




SLA5D LED Square line A5 Batten

Proudly Australian Owned and manufactured




Square Line A5 LED batten now available in LED. Single or continues mounting, can be surface mounted or suspended.

Part No	Power consumption (Watts)	CCT	CRI	COB Lumens	Lumen Flux	Lifetime L70b50	Size (LxWxH) mm	Mounting centres	Weight (Mass)
SLA5D144AA830	32w	3000k	>80	4400lm	4150lm	50,000h	1175 x 68 x 76	900mm	1.5kg
SLA5D144AA840	32w	4000k	>80	4400lm	4150lm	50,000h	1175 x 68 x 76	900mm	1.5kg
SLA5D126AA830	19w	3000k	>80	2600lm	2450lm	50,000h	1175 x 68 x 76	900mm	1.5kg
SLA5D126AA840	19w	4000k	>80	2600lm	2450lm	50,000h	1175 x 68 x 76	900mm	1.5kg
SLA5D122AA830	16w	3000k	>80	2200lm	2050lm	50,000h	615 x 68 x 76	525mm	1.0kg
SLA5D122AA840	16w	4000k	>80	2200lm	2050lm	50,000h	615 x 68 x 76	525mm	1.0kg
SLA5D113AA830	10w	3000k	>80	1300lm	1200lm	50,000h	615 x 68 x 76	525mm	1.0kg
SLA5D113AA840	10w	4000k	>80	1300lm	1200lm	50,000h	615 x 68 x 76	525mm	1.0kg

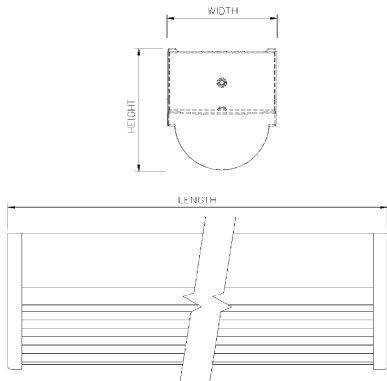

FEATURES

- Stand alone or continues mounting
- 0.55mm Zinc Anneal Steel Body
- Powder coated white
- A5 diffuser
- Low thermal resistance
- Average lifetime 50,000 hours
- Highly efficient
- IP40

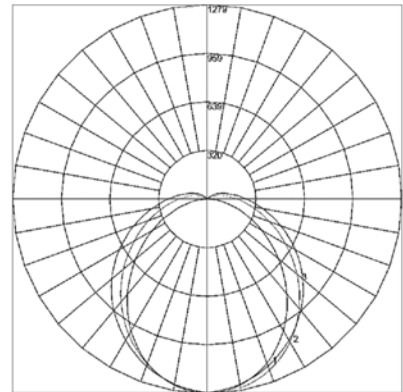

OPTIONS

- Colour temperature options
- Optional overcoated colours available
- Dimmable driver available
- DALI addressable
- Surface mounted
- Suspended
- Wall mounted

Compliance / Approvals

- AS60598
- CISPR15(EMC)
- SAA
- IP40
- Input Voltage 220-240 / 50Hz

Disclaimer:

Whilst every care has been taken to ensure its accuracy, Harcroft Lighting will not accept responsibilities for any errors and omissions. Harcroft Lighting reserves the right to make changes from time to time without notice or obligation in specification, design, colour or materials including alterations to or discontinue models.