

# CWFTB LED

**CORROSION & WEATHERPROOF  
FROSTED TWIN BODY**




# HARCROFT LIGHTING

Proudly Australian Owned and manufactured




Corrosion & weatherproof LED fitting has low thermal resistance, highly efficient output with frosted Polycarbonate body, linear pattern diffuser with a rugged 0.7mm steel reflector gear Tray and tamperproof stainless steel clips. Capable of withstanding temperatures as low as -25°C standard -40°C remote control gear IP65 Rated

Part No	Power consumption (Watts)	CCT	CRI	COB Lumen	Lumen Flux	Lifetime L70b50	Size ( LxWxH ) mm	Mounting centres	Weight (Mass)
CWFTB116AA830	12w	3000k	>80	1600lm	1250lm	50,000h	670 x 165 x 110	475	2.5kg
CWFTB122AA830	16w	3000k	>80	2200lm	1700lm	50,000h	670 x 165 x 110	475	2.5kg
CWFTB128AA830	20w	3000k	>80	2800lm	2200lm	50,000h	670 x 165 x 110	475	2.5kg
CWFTB116AA840	12w	4000k	>80	1600lm	1250lm	50,000h	670 x 165 x 110	475	2.5kg
CWFTB122AA840	16w	4000k	>80	2200lm	1700lm	50,000h	670 x 165 x 110	475	2.5kg
CWFTB128AA840	20w	4000k	>80	2800lm	2200lm	50,000h	670 x 165 x 110	475	2.5kg
CWFTB132AA830	23w	3000k	>80	3200lm	2500lm	50,000h	1270 x 165 x 110	903	4.0kg
CWFTB144AA830	32w	3000k	>80	4400lm	3400lm	50,000h	1270 x 165 x 110	903	4.0kg
CWFTB157AA830	40w	3000k	>80	5700lm	4400lm	50,000h	1270 x 165 x 110	903	4.0kg
CWFTB132AA840	23w	4000k	>80	3200lm	2500lm	50,000h	1270 x 165 x 110	903	4.0kg
CWFTB144AA840	32w	4000k	>80	4400lm	3400lm	50,000h	1270 x 165 x 110	903	4.0kg
CWFTB157AA840	40w	4000k	>80	5700lm	4400lm	50,000h	1270 x 165 x 110	903	4.0kg

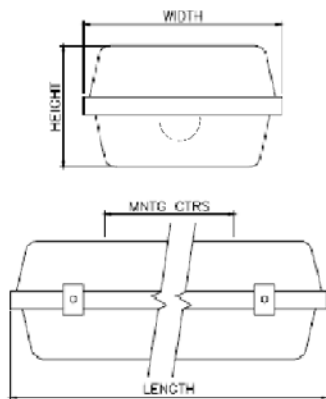

### FEATURES

- IP65 Rated
- Average lifetime 50,000h
- Low thermal resistance
- Polycarbonate body & linear diffuser
- Tamperproof stainless steel clips
- Capable of withstanding temperatures of -40°C
- 5 Year warranty (subject to Terms and conditions)

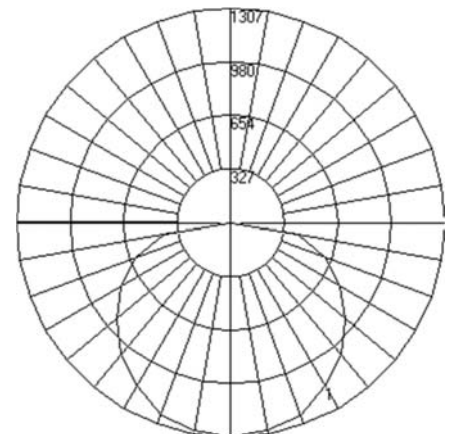

### OPTIONS

- Colour temperature options (kelvin)
- Clear (CWFB) Diffuser
- Dimming option
- DALI addressable
- Sensing options
- 40°C with remote control gear
- Plug & lead options

This fitting can be modified to order please contact our sales department with your requirements

### Compliance / Approvals

- Input voltage 220-240 / 50Hz
- AS60598
- CISPR15(EMC)
- C-TICK

#### Disclaimer:

Whilst every care has been taken to ensure its accuracy, Harcroft Lighting will not accept responsibilities for any errors and omissions. Harcroft Lighting reserves the right to make changes from time to time without notice or obligation in specification, design, colour or materials including alterations to or discontinue models.